

Series 29 Interior and Exterior Application

A PRIMID TGIC-FREE POLYESTER POWDER COATING FOR METAL FACADES AND STEEL CONSTRUCTION BASIS

Typical applications

- residential windows and doors
- lawn mowers and garden equipment
- patio furniture
- automotive accessories
- bicycles and motorcycles
- agricultural machinery
- sporting goods
- internal ship components

Product details

Standard packaging in original 20 kg (44 lb) box and 2.5 kg (5 lb) minipack

Specific gravity (ISO 8130-2) approximately 1.2-1.7 g/cm³ depending on pigmentation

Theoretical coverage at 2.5 mils - 3.5 mils (60 µm - 80 µm) film thickness: **9.8 - 13.8 m²/kg (47.8 - 67.4 ft²/lb)**. (please see also Information Sheet no. 1072 – latest edition)

Storage stability Use before: see printed date on product label; under dry conditions at no more than 25° C (77 °F), avoid direct and extended heat exposure

(The shelf life of custom made blanket orders or other stock agreements which by their nature are stored over longer periods is determined by the original production date.)

Features

- highly weather resistant
- very good flow properties
- very good mechanical properties
- good storage stability
- batch consistency of RAL colors acc. to VdL guidance no. 10

Finish

finish	gloss
smooth <i>glossy</i>	80-95*
smooth <i>semi-gloss</i>	70±5*
smooth <i>matte</i>	20-35*

* Gloss level acc. to ISO 2813/60° angle (doesn't apply to metallic effect powder coatings). The measured gloss level of effect powder coatings can diverge from the details given in this product datasheet. The creation of tolerance samples is urgently recommended)

Available in 50 RAL colours as stocked-product in smooth matte finish. Product can be custom-matched in limited colours in smooth: matte, semi-gloss and high-gloss finishes (minimum order quantity limitation applies).

Pretreatment (alternatives)

The following table reflects the common methods of pretreatment with regards to various substrates and applications. In selecting the proper type of pretreatment please observe the suitability of the type of powder coating for a desired application according to the guidelines of this Product Data Sheet.

	Aluminum	Galvanized Steel	Steel
1)*2) Chromating	○	○	○
2) Pre-Anodizing		○	
2) Chrome free	○	○	
Iron Phosphating			○
Zinc Phosphating		○	○
Blasting			○
3) Sweeping		○	○
	I	E	A
	I	E	A
	S	I	E
	S	I	E

Application: I = interior; E = exterior; A = architectural; S = steel

1) acc.to DIN 12487

2) acc. to GSB and QUALICOAT quality and test regulations.

3) only for zinc coated parts > 45 µm

4) for a two-coat process TIGER Shield

Processing

Corona and Tribostatic*

* Suitability of metallic and fine texture effects for tribo processing must be verified prior to actual application. Please consult with the relevant application guidelines for metallic effect powder coatings, latest edition.




Materials approvals for colours and metallic effects*

finish	QUALICOAT Class 1	AAMA 2603
smooth <i>glossy</i>	P-1643	✓
smooth <i>semi-gloss</i>	P-1667	✓
smooth <i>matte</i>	P-1668	✓

* Exemptions prevail

Cure parameters

(substrate temperature versus curing time)

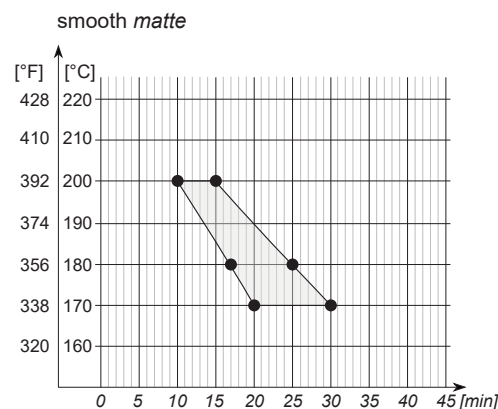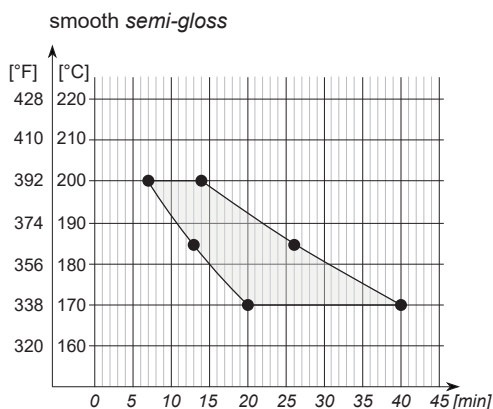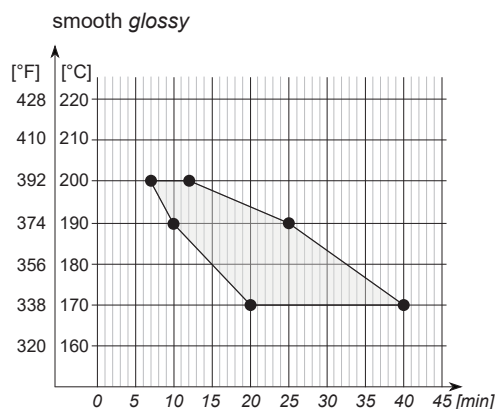

Please observe cure parameters closely since mechanical properties will develop before full cross-linking!

Test results

Checked under laboratory conditions on a pretreated aluminum test panel which is 0.7 mm (1/64 inch) thick. Actual product performance may vary due to product specific properties such as gloss, color, effect and finish as well as application related and environmental influences.

test method	test	Series 29 smooth glossy smooth semigloss smooth matte
ISO 2360	film thickness recommended	60-80 µm
ISO 2813	gloss - 60°	gl. 80-95 sgl. 70±5 matte 20-35
ISO 2409	cross cut test/adhesion 1 mm cutting distance	0
ISO 1519	mandrel bending test cracking of coating	≤ 5 mm not permitted
ISO 2815	impression hardness	≥ 80
ISO 1520	cupping test cracking of coating	≥ 5 mm not permitted
ASTM D 2794	ball impact test cracking of coating	20 Inch/pound not permitted
ISO 6270-1	determination of resistance to humidity 1000 h	Delamination around scribe max. 1 mm
ISO 9227	salt spray test 1000 h	Delamination around scribe max. 1 mm
acc. To EN ISO 16474-3	accelerated weathering UV-B (313 nm) 300 h *	residual gloss ≥ 50%
EN ISO 16474-2	accelerated weathering test xenon-arc radiation 1000 h **	residual gloss ≥ 50%
EN ISO 2810	natural weathering in Florida 12 month	residual gloss ≥ 50%

acc. to GSB AL 631 (www.gsb-international.de) ** acc. To QUALICOAT specifications (www.qualicoat.net)

Processing instructions

The guidelines for application (datasheet 1213) must be strictly observed.

The Product Data Sheets, Technical Information Sheets and the guidelines for application each in their latest version, available as a download at www.tiger-coatings.com.

Disclaimer

TIGER's verbal and written recommendations for the use of its products are based upon experience and in accordance with current technological standards. These are provided in order to support the buyer or user. They are non-committal and do not create any additional commitments to the purchase agreement. They do not release the buyer from verifying the suitability of TIGER products for the intended application. TIGER warrants that its products are free of flaws and defects to the extent stipulated in the Terms of Delivery and Payment.

As part of TIGER product information program, each Product Data Sheet is updated periodically. The latest version shall prevail. It is recommended to always check for the latest editions on TIGER's website download area www.tiger-coatings.com to make sure you have the most current version of this Product Data Sheet. The information on TIGER's Product Data Sheets are subject to change without notification.

This Product Data Sheet substitutes any and all previous Product Data Sheets and notes for customers published on this subject matter and is only intended to give a general product overview. Please request specific information for products outside of our standard product list (latest version).

The Technical Information Sheets and the Terms of Delivery and Payment each in their latest version, available as a download at www.tiger-coatings.com, form an integral part of this Product Data Sheet.

Certified according to
ISO 9001 | 14001

TIGER Drylac Canada Inc.
110 Southgate Drive
Guelph, ON N1G 4P5 | Canada
T 1 800 243 8148
F 1 877 926 8148
E office.ca@tiger-coatings.com
W www.tiger-coatings.com